

FORM PTO- 1390
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

0139US-HYDRAMATIC

U.S. APPLICATION NO (if known see 37 CFR 1.5)

09/937683

INTERNATIONAL APPLICATION NO
PCT/AU00/00285INTERNATIONAL FILING DATE
March 31, 2000PRIORITY DATE CLAIMED
March 31, 1999TITLE OF INVENTION **Method and Apparatus for Insertion of Rock Bolts**APPLICANT(S) FOR DO/EO/US **CHARLTON, Paul and FLYNN, Daniel**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1)
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19(35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)),
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:

Copy of form PCT/IB/332, International Search Report. Cover pages of application as filed.

METHOD AND APPARATUS FOR INSERTION OF ROCK BOLTSBACKGROUND

The present invention relates to insertion of rock bolts used in applications such as but not limited to underground mining. More particularly, the invention relates to an automatic drilling and injection head and a method of use thereof for automatic installation of self drilling rock bolts thereafter secured by preselected anchoring compounds.

Rock bolts are commonly used as anchors for securing rock strata to prevent unwanted collapse during mining operations such as excavation and the like. They are a proven means of securing rock masses in underground excavations and road tunnelling which might otherwise be in danger of collapse. Efficient installation of rock bolts is a critical facet of mining operations and it is desirable that this non productive part of mining activities be done as speedily as possible.

The concept of rock bolting involves the installation of a bolt in a predrilled hole in rock whose length is longer and whose diameter is slightly larger than the diameter of the rock bolt inserted therein.

PRIOR ART

There are in existence a wide variety of rock bolts and drilling machines for insertion of said bolts. The drilling machines employ drill rods with a cutting tip or drill bit on the leading end of the drill rod. The drill bit is usually larger in diameter than the drill rod to ensure a hole diameter at least slightly larger than the diameter of the drill rod. In order to drill a hole, the drill rod is rotated and urged against the rock face to initiate penetration.

In accordance with conventional methodology, most drill rods use air or water as a flushing fluid to flush rock cuttings from the drill hole during drilling. The flushing fluid is normally pumped through a central hole in the drill rod exiting the cutting tip then flowing out of the drill

hole between the sides of the drill rod and the rock bolt hole thereby removing the rock cuttings from the hole during the drilling operation. The hole flushing clears the hole to accommodate the anchoring compound which is normally inserted manually after drilling. Whilst all drills employ rotation and axial thrust some additionally use impact drilling for very hard rock. Drilling into softer rocks such as sandstone will generally only require rotation and thrust. Hole drilling speed is a function of the type of rock, drill bit material and configuration and axial force applied during drilling. After drilling is complete, rock bolts are inserted once the drill rod has been withdrawn. There are two broad categories of rock bolts which are differentiated by the manner of engagement between bolt and rock. Bolts in the first category rely on frictional engagement between the bolt and at least a portion of the wall of the pre-drilled bolt hole. Bolts in the second category rely for their anchorage on grouting between the rock wall and bolt. The grouting compound will either be chemical or cement based.

Friction bolts rely on expansion of an associated member such as a sleeve which is engaged for example by rotation of a nut after insertion of the bolt in its hole, whereupon the sleeve engages the wall tightly to resist unwanted withdrawal. Bolts of this type include expansion shell bolts, inflating bolts and split set bolts.

Grouted rock bolts rely entirely on the integrity of the grouting compound which is inserted into the bolt hole once the hole is drilled. Maximum engaging strength is not achieved until the grout has set and has formed a solid anchor around the rock. A typical grouting compound is polyester resin although other compounds are used.

The coal industry commonly uses grouted rock bolts using resin anchors. The resin is held in cartridges which are inserted into predrilled bolt holes prior to insertion of the bolt. The resin

cartridges are filled with resin mastic and resin catalyst and are typically 500 mm to 1500 mm in length. They must be of a diameter smaller than the bolt hole to enable insertion.

According to conventional methodology the steps involved in insertion of a resin anchored rock bolt are as follows:

- a) drilling a hole of a diameter which is larger than the diameter of a bolt to be inserted;
- b) withdrawing the drill rod from the hole;
- c) manually inserting the resin cartridge;
- d) inserting the bolt into the hole such that the bolt engages the resin cartridge and urges it to the back of the hole;
- e) rotating and advancing the rock bolt such that the bolt penetrates the cartridge causing mixing of the cartridge contents (mastic and catalyst);
- f) urging the bolt to full penetration whilst continuing rotation of the bolt;
- g) allowing resin to cure and harden; and
- h) tightening a nut on the proximal exposed end of the bolt to securely engage said bolt.

Whilst the above described method, used in various forms over the past twenty years, results in effective anchorage of rock bolts in underground mining applications, the process described is labour intensive, time consuming and therefore costly and is susceptible to poor quality control.

There has been a long felt want in the mining industry for more efficient installation of bolts of the type which rely on grouting for anchorage, to reduce the time and labour component disadvantages of the present methodology.

Attempts have been made to address the aforesaid problems in resin anchored bolt installations by using self drilling rock bolts of the type described in patent application PCT/AU91/00503

One such attempt involved the use of self drilling hollow rock bolts to obviate the step of

pre-drilling followed by withdrawal of the drill prior to insertion of the bolt. The self drilling bit functions as a combined drill and bolt. During self drilling, the hole is flushed with water to expel rock debris until the bolt has reached maximum depth whereupon the fluid is turned off. A grouting compound is then inserted into the space between the bolt and hole wall until the available space is occupied by the anchoring compound which could be resin or cement grout. Cement grout has major advantages over resin in that it can be mixed in a machine then pumped into the rock bolt hole. As the curing time for the cement grout is typically several hours, it is procedurally simple to mix and pump cement grout and flush hoses and the machine before curing. The major disadvantage of cement grouting is that the cement takes several hours to cure which is unacceptable in the coal industry. Resin anchored bolts have the advantage that the resin cures in about 20 seconds but this fast setting may cause problems of clogging in the resin delivery and mixing system once the mastic and catalyst, which are initially separated, have thoroughly mixed.

INVENTION

The present invention seeks to ameliorate the aforesaid prior art disadvantages by providing a method and associated apparatus for installing and anchoring self drilling rock bolts using an improved resin delivery and mixing system. The present invention also seeks to provide a system for installation of self drilling bolts, quickly and efficiently without clogging of the resin and delivery system. According to one embodiment of the invention there is provided a drilling head for attachment to a drilling machine wherein the drilling head has means for rotation thrust and feed of a rock bolt, means for water injection and an apparatus for resin injection.

More particularly, according to one embodiment, the invention comprises a drill head adapted for releasable attachment to a drilling apparatus, wherein the drill head includes means to receive a

proximal end of a self drilling rock bolt having an internal cavity and further comprising means to enable injection through said internal cavity of resin grout such as a mastic and a catalyst; wherein said mastic and said catalyst whilst present in said drill head are separated until co injection into said internal cavity of said bolt, whereupon mixing of said mastic and catalyst occurs to form a resin in which said bolt anchors; wherein the resin is injected into said cavity until it exits an opening in a distal end of said bolt and fills a space between the exterior of said bolt and the wall of said hole.

It is one object of the invention to provide a drill head for adaption to a drilling machine which allows the normal actions of rotation, axial thrust, water or air injection as well as injection through a rock bolt of a grouting compound. It is a further object to provide an improved injection system for flushing rock cuttings during drilling.

In one broad form the present invention comprises a drill head capable of attachment to a drilling machine for insertion of rock bolts into rock strata; the drill head comprising; a base block including means to facilitate attachment to said drilling machine; means for driving a spindle having a member at one end which receives a proximal end of a rock bolt including an internal cavity; an injection assembly including at least one internal passage for retaining a grouting compound, wherein, when said rock bolt is inserted in said member and when said injection member engages said member, said at least one passage is in communication with said internal cavity in said rock bolt, whereupon said injection assembly operates to inject a predetermined quantity of said grouting compound into a bolt hole in said rock strata via said internal cavity of said bolt. Preferably the spindle is rotatable and said member which engages said proximal end of said rock bolt comprises a chuck. Upon rotation of said spindle said rock bolt also rotates. The drill head further comprising passages through which a flushing

fluid flows and which are in fluid communication with said cavity in said rock bolt.

The the injection assembly according to one embodiment does not rotate but is capable of axial extension and retraction independant of said spindle. The injection nozzle functions as a shut off valve to isolate said flushing fluid from said cavity and includes two concentric passages each of which contains a separate grouting material, wherein said passages are disposed so as to keep the grouting materials separate until said materials exit said passages and enter the internal cavity in the rock bolt whereupon they mix to form a grouting resin.

The grouting resin exits the internal cavity of the bolt via a distal end of said bolt and fills a space between an outer surface of the bolt and a wall of a hole in which the bolt is placed.

The member for receiving said proximal end of said rock bolt includes a recess which includes a profile which conforms to and engages with a corresponding profile on said proximal end of said bolt to enable mutual rotation of said member with said rock bolt. The profile of said recess is hexagonal and receives a corresponding hexagonal external profile formed in said proximal end of said rock bolt. The rock bolt is self drilling

The injection assembly is capable of movement between a retracted state in which water is capable of entering said cavity of said rock bolt during drilling and an extended state when drilling has ceased in which an end of said injection assembly engages an opening to said cavity thereby allowing the passage of a grouting material held in said injection assembly into said bolt hole via said cavity in said bolt. Preferably, the grouting materials include polyester resins, PVA and epoxy resins.

According to a further apparatus aspect, the present invention comprises;

a drill head capable of attachment to a drilling machine for insertion of rock bolts into rock strata; the drill head comprising,

a base block including means to facilitate said attachment to said drilling machine;
drive means for driving a spindle having a member at one end which engages a proximal end of a rock bolt including an internal cavity;
an injection assembly including at least one internal passage for retaining a grouting compound, wherein, when said rock bolt is inserted in said member said at least one passage is in communication with said internal cavity in said rock bolt; whereupon said injection assembly operates to inject a predetermined quantity of said grouting compound into said internal cavity of said bolt. Preferably, the member in which the distal end of the rock bolt is placed is a female socket having a hexagonal internal profile which corresponds with a corresponding external hexagonal profile on said rock bolt.

Preferably, the drill head further comprises means enabling injection through passages therein of water into the bolt hole to evacuate rock debris from the hole during drilling.

According to a preferred embodiment, the injection assembly includes two concentric passages each of which contains a separate grouting material, wherein said passages are disposed so as to keep the grouting materials separate until the materials exit said passages and enter the internal cavity in said rock bolt whereupon they mix to complete the grouting resin.

Preferably, the grout is injected until it exits the internal cavity of the bolt via a distal end and fills a space between an outer surface of the bolt and the wall of the hole in which the bolt is placed.

In another broad form of the apparatus aspect, the present invention comprises;

a drill head capable of attachment to a drilling machine for insertion of rock bolts into rock strata;
the drill head comprising,

a base block including means to facilitate said attachment to said drilling machine;

drive means for driving a spindle having a member at one end which engages a proximal end of

a rock bolt which includes an internal cavity;
 an injection assembly including at least one internal passage for retaining a grouting compound,
 wherein, when said rock bolt is inserted in said member, said at least one passage is in
 communication with the internal cavity in said rock bolt; whereupon said injection assembly
 operates to inject a predetermined quantity of said grouting compound into said internal cavity of
 said bolt; wherein the drill head further comprises means enabling injection through passages
 therein of water into the bolt hole to evacuate rock debris from the hole; and wherein
 the injection assembly has two concentric passages each of which contains a separate grouting
 compound, wherein said passages are disposed so as to keep the grouting compounds separate
 until the compounds exit said passages and enter the internal cavity in said rock bolt whereupon
 they mix on contact to form a grouting resin.

Preferably, the grout exits the internal cavity of the bolt via a distal end and is injected until it fills
 a space between an outer surface of the bolt and the wall of the hole in which the bolt is placed.

In another broad form the present invention comprises,

a drill head capable of attachment to a drilling machine for insertion of a rock bolt into rock
 strata; the drill head including;

a sprocket for receiving an end of said rock bolt which includes an internal cavity,
 an injection assembly including a passage for retaining a grouting compound and which when said
 bolt engages said sprocket is placed in communication with said internal cavity of said bolt;
 wherein the injection assembly injects said grouting compound into the internal cavity of said
 bolt at least until said compound exits said internal cavity of said bolt and engages a wall of a hole
 in which said bolt is inserted.

Preferably, the grouting compound is injected until it fills the space between the exterior of the bolt and the wall of the hole in which the bolt is inserted.

In the broadest form of the apparatus aspect the present invention comprises;

a drill head having an injection assembly adapted to enable injection of a grouting compound from a passage in the drill head and into a bolt hole via an internal cavity in a rock bolt which communicates with said passage when an end of said bolt engages said drill head such that said passage and said internal cavity are substantially in alignment

In another broad form of the apparatus aspect the present invention comprises;

a self drilling rock bolt for insertion in a rock strata and adapted to engage a drilling head capable of attachment to a drilling machine; wherein the rock bolt comprises; a proximal end and a distal end and an internal cavity therebetween: the proximal end having a mating profile which engages a corresponding profiled member on said drilling machine enabling mutual rotation of said bolt and said member, the distal end including an opening to said cavity for receiving a grouting material delivered to said bolt from said head. Preferably, when said bolt engages said head, said cavity in said bolt is in general alignment with a cavity in said head containing said grouting material. According to a preferred embodiment, an opening in said proximal end of said bolt receives at least one grouting material which advances along said cavity until it exits said bolt via said at least one opening in said distal end. Preferably, two grouting materials are employed but it will be appreciated that more than two grouting materials could be mixed in the cavity prior to exiting via said at least one opening in said distal end.

In one broad form of the method aspect the present invention comprises:

a method of insertion of a self drilling rock bolt in a rock strata using a drilling machine to which is attached a drill head: wherein the method comprises the steps of ;

- a) placing said drilling machine in alignment with a location at which a bolt is to be inserted;
- b) taking a rock bolt having an internal cavity;
- c) engaging an end of the rock bolt with a support member on said drill head;
- d) advancing the drill head such that a distal end of the bolt engages rock into which the bolt is to be inserted.
- e) rotating the bolt under the action of drive means associated with said head and maintaining an axial force such that the bolt self drills a hole in said rock strata;
- f) during drilling, flushing the hole with a fluid such as water to remove unwanted rock cuttings.
- g) injecting a grouting compound from at least one passage in an injection assembly into the cavity in said bolt;
- h) continuing said injection of said compound at least until said compound exits the cavity in said bolt via openings in said bolt and enters an opening in the bolt hole between the wall of said hole and the exterior of said bolt.

According to a preferred embodiment, the method comprises the further step of, prior to injecting the compound into the cavity in said bolt, advancing an injection nozzle into sealing engagement with a proximal end of said bolt thereby allowing direct communication between the passage in said head and the cavity in said bolt

In another broad form of the method aspect the present invention comprises: a method of grouting a rock bolt inserted in a rock strata using a drilling machine incorporating a drilling head; wherein the method of grouting comprises the steps of,

- a) after a rock bolt has been placed in situ, advancing an injecting nozzle of an injection assembly incorporated in said head until it reaches sealing engagement with a proximal

- end of the rockbolt;
- b) injecting a grouting compound from a passage in said injection assembly into an internal cavity in said bolt;
 - c) continuing said injection until the grouting compound exits said internal cavity of said bolt and fully occupies a space formed between the exterior of said bolt and the wall of said hole;
 - d) retracting said nozzle away from sealing engagement with said bolt.

DETAILED DESCRIPTION

The present invention will now be described in more detail according to a preferred but non limiting embodiment and with reference to the accompanying illustrations wherein;

- Figures 1(a)-(f). show various steps for insertion of a rock bolt according to the prior art methodology;
- Figure 2 . shows an isometric exploded view of a rock bolting installation assembly with a drill head according to one embodiment of the invention.
- Figure 3 shows an enlarged cut away view of a drill head according to a preferred embodiment of an apparatus aspect of the invention.
- Figure 4 shows an enlarged cross sectional view of the drill head of figure 3 adapted internally in the drilling configuration;
- Figure 5 shows the drill head of figure 3 adapted internally in the grouting configuration;
- Figure 6 shows the drill head of figure 3 adapted internally for water and injection shut off
- Figure 7 shows a cross section of a bolt when fully installed.

Drilling machines employ a variety of different systems to apply rotation and thrust to drill rods and usually have some form of drive chuck which can either be a screw thread, a square drive or hexagonal drive chuck which fits a matching screw, square or hexagonal section

of the drill rod. In long hole drilling, where multiple drill rods are used it is necessary to attach several drill rods together and pass them through the drilling head on the drilling machine. In this application an offset drive head may be used where the drive head is hollow and is offset from the main drilling motor itself. The offset drive head is normally driven by a gear system or by a chain from the drill motor. A flushing system is employed to remove rock cuttings from the drilling operation at the drill tip. This can be achieved by pumping water or air through the drill rods and getting the water or air to flow back down the hole along the outside of the drill rods. For this purpose water or air may be used or a combination of both forming a spray mist to remove cuttings.

Referring to figures 1(a-f) there is shown a drilling rig configured for the various stages of operation of installation of a rock bolt according to a prior art method. Figure 1a shows drilling rig 1 engaging rock face 2 via plate 3. The rig comprises head 4 which includes a drill chuck 5 which receives steel drill 6. While drilling takes place, water is injected into the drill hole to evacuate unwanted rock cuttings. Figure 1b shows the drill assembly of figure 1a wherein the drill steel has reached the limit of its travel and the bolt hole fully drilled through rock stratum 2a. At this point the water has been cut off and the drilling halted. Figure 1c shows the drill steel fully removed and chemical sausage 7 prior to its installation in bolt hole 8. Once the chemical sausage has been inserted, a mixing dolly is installed as shown in figure 1d on chuck 5 of drilling rig 1 following which it is advanced to and urged into hole 8 as shown in figure 1e while it is rotated for a predetermined time in order to mix the chemical in sausage 7. Once bolt 9 is fully inserted, rotation is halted whereupon it is left for enough time to allow the resin to set. Figure 1e shows the drilling machine with head 4 advanced to its extremity facilitating insertion of bolt 9 in rock stratum 2a. As shown in figure 1f, the drilling rig is then retracted leaving rock bolt 9 fully

inserted. The above described prior art method of rock bolt installation is labour intensive and time consuming. On occasions, insertion of the chemical sausage can lead to delay as bunching might occur at the hole opening and there is also a delay in curing of the resin. This requires a delay in removing the drilling head as this functions to keep the bolt in position during curing.

Figure 2 shows an exploded isometric view of a known roof bolter/drilling rig 10 including a drill head 11 according to a preferred embodiment of the invention. Drill head 11 may be connected to roof bolter 10 via engaging plates 13 by standard connection means. Thus, head 11 may be easily adapted to existing drilling equipment.

Figure 3 shows an enlarged partially cut away view of a drill head 20 according to one embodiment of the apparatus aspect of the invention. Drill head 20 comprises housing block 21 including a gear box 22 which is connected to a drive motor incorporated in a drilling rig such as that shown in figure 2

Gear box 22 further comprises drive assembly 22a and hydraulic motor 22b.

The head further comprises an offset drive spindle 23 including an integral drive chuck 24 which rotates responsive to operation of drive gears contained in gear box 22. Drive chuck 24 may be driven through either a gear system contained in gear box 22 or chain drive system (not shown)

Housing block 21 includes a network of passageways 25 which deliver drilling fluid from a reservoir passage 26 then to a self drilling bolt 30 seated in recess opening 24a in chuck 24

Housing block 21 further includes passageways 27 and 28 which receive and deliver constituents of a grouting compound 29 (see fig 5) which is to be injected into passage 34 of rock bolt 30.

Passageways 27 and 28 receive separate unmixed constituents of grouting compound 29 via feed ports 27a and 28.

Injection into bolt 30 is facilitated by means of an injection nozzle 31 which is capable of

advancing axially in the direction of rock bolt 30 and retracting away from bolt 30 depending upon which stage of operation the drill head 20 is engaged in. Injection nozzle 31 may comprise one only or multiple passages which receive constituents of the grouting compound. In the case of multiple constituents it is preferable that these are isolated until such time as the constituents exit the nozzle and enter the internal passage 34 of bolt 30 whereupon the constituents will mix. The constituents mix and react to eventually set and when the mix exits passage 34 it fills the available space between the exterior surface of rock bolt 30 and the wall of the hole in the rock stratum in which the bolt is placed to secure the bolt in position.

Advancement and retraction is preferably effected by a hydraulic piston 32 located in chamber 35. Offset drive spindle 23 further includes a sealing arrangement comprising a seal 33 which prevents unwanted escape of water from chuck 24 during drilling but allows communication between an internal passage 34 in bolt 30 and fluid passages 25 when injection nozzle 31 is retracted away from chuck 24 and drilling is in progress.

In operation, the first stage of the drilling operation involves insertion of the self drilling rock bolt 30 into rock using a conventional drilling rig such as that described in figure 2.

During drilling, to ensure removal of debris from the drill hole, fluid such as water is pumped through passages 25 which empty the fluid into internal passage 34 of bolt 30 eventually exiting bolt 30 and entering a space between bolt 30 and the drilled bolt hole (not shown). The fluid passes over the leading end of injection nozzle 31. As the fluid exits the bolt hole it takes with it rock cuttings produced during drilling. During the drilling phase of operation, nozzle 31 is retracted away from opening 23a of drive spindle 23 and is inactive. Furthermore, the nozzle is independent of rotation of the spindle 23 such that it is free from rotation during the drilling operation precluding the need for special sealing requirements to prevent escape of resin during

drilling.

Once the hole is fully drilled, the rock bolting can be completed without first having to retract the head away from the rock face as occurred in the prior art to facilitate insertion of the bolt.

Referring to figure 4 there is shown a cross section of the head 20 of figure 3 with corresponding part numbering. Figure 4 shows the drilling cycle in which the self drilling bolt 30 is rotated by its engagement to drive chuck 24 and the nozzle 31 retracted away from chuck 24 but allowing communication between passage 25 and internal passage 34 of bolt 30 thereby allowing free passage of fluid into passage 34 as previously described.

Figure 5 shows head 20 this time with fluid supply from passage 25 turned off and nozzle 31 advanced into engagement with chuck 24 thereby allowing injection of grouting compound 29 into passage 34 of bolt 30. The leading end 31a of nozzle 31 seals passages 27 and 28 (see fig 4) from leakage such that their contents will discharge into passage 34 of bolt 30 forming grouting compound 29. Preferably, the grout is formed from a blend of resin mastic and resin catalyst which mix inside passage 34 of bolt 30 and which are excluded from contact while in respective passages 27 and 28 of injection nozzle 31. The resin compound is fast curing allowing quicker completion of bolt anchorage. The resin compound is injected into passage 34 of bolt 30 by piston 32 until it eventually exits openings 38 in bolt 30 and fills a space between exterior of bolt surface 39 and wall surface 40 of bolt hole wall 41.

Figure 6 shows the final stage of the drilling operation with injection nozzle 31 fully retracted and flushing fluid turned off. At this stage, the spindle is rotated in the opposite direction to that for drilling whereupon engagement between a nut 42 (see figure 7) on bolt 30 is tightened.

Figure 7 shows an enlarged cross sectional view of bolt 30 inserted in a rock stratum 37 secured by grouting compound 29 between external surface 39 of bolt 30 and wall 41. An advantage of

the invention described with reference to the above embodiment is the provision of separate grout injection and fluid flushing systems in the drill head. The injection nozzle 31 functions as a shut off valve such that in the fully retracted position, its internal passages are isolated from grout constituent passages 27 and 28.

The arrangement described above has numerous advantages over the prior art arrangements including: a minimum of moving parts, offset hollow drive spindle system, non rotating and self cleaning injection nozzle independent of the rotation of the spindle, use of the drilling fluid to clean the nozzle. the ability of the nozzle to act as a shut off valve for grout injection.

It will be recognised by persons skilled in the art that numerous variations and modification may be made to the invention as broadly described herein , such as but not limited to:

- a) use of alternative grouting compounds such as polyester resins, PVA, epoxy resins and any single or multi component compound;
 - b) use of self drilled cable bolts, rods or tubes and indeed any form of rock bolt capable of use with the method and head described above;
 - c) use of injection needles or syringes and any fitting adapted to seal against any rock bolt capable of use with the assembly described;
 - d) automation of the system using a Programmable Logic Computer to govern and regulate drilling cycles and more particularly injection cycles;
- without departing from the overall spirit and scope of the invention

THE INVENTION IS DESCRIBED IN THE FOLLOWING CLAIMS

- 1 A drill head capable of attachment to a drilling machine for insertion of rock bolts into rock strata; the drill head comprising;
- a base block including means to facilitate attachment to said drilling machine;
- means for driving a spindle having a member at one end which receives a proximal end of a rock bolt including an internal cavity;
- an injection assembly including at least one internal passage for retaining a grouting compound, wherein, when said rock bolt is inserted in said member and when said injection member engages said member, said at least one passage is in communication with said internal cavity in said rock bolt; whereupon said injection assembly operates to inject a predetermined quantity of said grouting compound into a bolt hole in said rock strata via said internal cavity of said bolt.
- 2 A drill head according to claim 1 wherein said spindle is rotatable and said member which engages said proximal end of said rock bolt comprises a chuck.
- 3 A drill head according to claim 2 wherein, upon rotation of said spindle said rock bolt also rotates.
- 4 A drill head according to claim 3 further comprising passages through which a flushing fluid flows and which are in fluid communication with said cavity in said rock bolt.
- 5 A drill head according to claim 4 wherein the the injection assembly does not rotate but is capable of axial extension and retraction independant of said spindle
- 6 A drill head according to claim 5 wherein, said injection nozzle functions as a shut off valve to isolate said flushing fluid from said cavity.
- 7 A drill head according to claim 6 wherein the injection assembly includes two concentric passages each of which contains a separate grouting material, wherein said passages are

disposed so as to keep the grouting materials separate until said materials exit said passages and enter the internal cavity in said rock bolt whereupon they mix to form a grouting resin.

8 A drill head according to claim 7, wherein, the grouting resin exits the internal cavity of the bolt via a distal end of said bolt and fills a space between an outer surface of the bolt and a wall of a hole in which the bolt is placed.

9 A drill head according to claim 8 wherein the member for receiving said proximal end of said rock bolt includes a recess which includes a profile which conforms to and engages with a corresponding profile on said proximal end of said bolt to enable mutual rotation of said member with said rock bolt.

10 A drill head according to claim 9 wherein the profile of said recess is hexagonal and receives a corresponding hexagonal external profile formed in said proximal end of said rock bolt.

11 A drill head according to claim 10 wherein said said rock bolt is self drilling.

12 A drill head according to claim 11 wherein said injection assembly is capable of movement between a retracted state in which water is capable of entering said cavity of said rock bolt during drilling and an extended state when drilling has ceased in which an end of said injection assembly engages an opening to said cavity thereby allowing the passage of a grouting material held in said injection assembly into said bolt hole via said cavity in said bolt.

13 A drill head according to claim 12 wherein the grouting materials include polyester resins, PVA and epoxy resins.

14 A drill head capable of attachment to a drilling machine for insertion of rock bolts into rock strata; the drill head comprising; a base block including means to facilitate said attachment to said drilling machine:

drive means for driving a spindle having a member which engages a proximal end of a

rock bolt including an internal cavity;
 an injection assembly including at least one internal passage for retaining a grouting material,
 wherein, when said rock bolt is inserted in said member, said at least one passage is in
 communication with the internal cavity in said rock bolt; whereupon said injection assembly
 operates to inject a predetermined quantity of said grouting compound into said internal cavity of
 said bolt; wherein the drill head further comprises means enabling injection through passages
 therein of water into a bolt hole to evacuate rock debris from the hole during drilling.

15 A drill head according to claim 14 wherein the injection assembly has two concentric
 passages each of which contains a separate grouting compound, wherein said passages are
 arranged so as to keep the grouting compounds separate until the compounds exit said passages
 and enter the internal cavity in said rock bolt whereupon they mix to form a grouting resin prior
 to exiting said bolt.

16 A drill head according to claim 15 wherein the grout exits the internal cavity of the bolt
 via openings in a distal end and is injected until it fills a space between an outer surface of the
 bolt and the wall of the hole in which the bolt is placed

17 A drill head capable of attachment to a drilling machine for insertion of a self drilling rock
 bolt into rock strata; the drill head including;
 a sprocket for receiving an end of said rock bolt which includes an internal cavity,
 an injection assembly including a passage for retaining a grouting compound and which when
 said bolt engages said sprocket is placed in communication with said internal cavity of said bolt;
 wherein the injection assembly injects said grouting compound into the internal cavity of said
 bolt at least until said compound exits said internal cavity of said bolt and engages a wall of a hole
 in which said bolt is inserted.

18 A drill head according to claim 17 wherein, the grouting compound is injected until it fills the space between the exterior of the bolt and the wall of the hole in which the bolt is inserted.

19 A drill head capable of attachment to a drilling machine for insertion of a self drilling rock bolt into rock strata; wherein the head includes an injection assembly adapted to enable injection of a grouting compound from a passage in the drill head and into a bolt hole via an internal cavity in said rock bolt which communicates with said passage in said drill head when an end of said bolt engages said drill head such that said passage and said internal cavity are substantially in alignment.

20 A self drilling rock bolt for insertion in a rock strata and adapted to engage a drilling head capable of attachment to a drilling machine; wherein the rock bolt comprises; a proximal end and a distal end and an internal cavity therebetween: the proximal end having a mating profile which engages a corresponding profiled member on said drilling machine enabling mutual rotation of said bolt and said member during insertion of said bolt, the bolt further including at or near said distal end at least one opening in communication with said cavity for discharging a grouting material delivered to said bolt from said head.

21 A self drilling rock bolt according to claim 20 wherein, when said bolt engages said head, said cavity in said bolt is in general alignment with a cavity in said head containing said grouting material.

22. A self drilling rock bolt according to claim 21 wherein an opening in said proximal end of said bolt receives at least one grouting material which advances along said cavity until it exits said bolt via said at least one opening in said distal end

23 A self drilling rock bolt according to claim 22 wherein, two grouting materials discharged from said head mix in said cavity in said bolt prior to exiting via said at least one opening in said

distal end.

24 A method of insertion of a self drilling rock bolt in a rock strata using a drilling machine to which is attached a drill head; wherein the method comprises the steps of ;

- a) placing said drilling machine in alignment with a location at which a rock bolt is to be inserted;
- b) taking a rock bolt having an internal cavity;
- c) engaging a proximal end of the rock bolt with a support member on said drill head;
- d) advancing the drill head such that a distal end of the bolt engages rock into which the bolt is to be inserted;
- e) rotating the bolt under the action of drive means associated with said head and maintaining an axial force such that the bolt self drills a hole in said rock strata;
- f) during drilling, flushing the hole via the internal cavity of the bolt with a fluid such as water to remove unwanted rock cuttings;
- g) injecting a grouting compound from at least one passage in said head and into the cavity in said bolt;
- h) continuing said injection of said compound at least until said compound exits the cavity in said bolt and enters an opening in the bolt hole between the wall of said hole and the exterior of said bolt.

25 A method according to claim 24 comprising the further step; prior to injecting the compound into the cavity in said bolt, of advancing an injection nozzle into sealing engagement with a proximal end of said bolt thereby allowing direct communication between the passage in said head and the cavity in said bolt

26 A method according to claim 25 wherein said passage is in an injection assembly which delivers said grouting material.

27 A method of insertion of a self drilling rock bolt in a rock strata using a drill head capable of attachment to a drilling machine for insertion of a rock bolt into rock strata; wherein the head includes an injection assembly adapted to enable injection of a grouting compound from a passage in the drill head and into a bolt hole via an internal cavity in a rock bolt which communicates with said passage in said drill head when an end of said bolt engages said drill head such that said passage and said internal cavity are substantially in alignment; wherein the method comprises the steps of ;


- a) placing said drilling machine in alignment with a location at which a rock bolt is to be inserted;
- b) taking a rock bolt having an internal cavity;
- c) engaging an end of the rock bolt with a member on said drill head;
- d) advancing the drill head such that a distal end of the bolt engages rock into which the bolt is to be inserted;
- e) rotating the bolt under the action of drive means associated with said head and maintaining an axial force such that the bolt self drills a hole in said rock strata,
- f) during drilling, flushing the hole with a fluid such as water to remove unwanted rock cuttings;
- g) injecting a grouting compound from at least one passage in said head and into the cavity in said bolt.
- h) continuing said injection of said compound at least until said compound exits the cavity in said bolt and enters an opening in the bolt hole between the wall of said hole and the

exterior of said bolt.

28 A method according to claim 27 wherein the injection assembly shuts off flushing fluid flow during injection of said grouting material into said cavity in said bolt.

29 A method of grouting a rock bolt inserted in a rock strata using a drilling machine incorporating a drilling head; wherein the method of grouting comprises the steps of;

- a) after a rock bolt has been placed in situ, advancing an injecting nozzle of an injection assembly incorporated in said head until it reaches sealing engagement with a proximal end of the rock bolt;
- b) injecting a grouting compound from a passage in said injection assembly into an internal cavity in said bolt;
- c) continuing said injection until the grouting compound exits said internal cavity of said bolt and fully occupies a space formed between the exterior of said bolt and the wall of said hole;
- d) retracting said nozzle away from sealing engagement with said bolt.

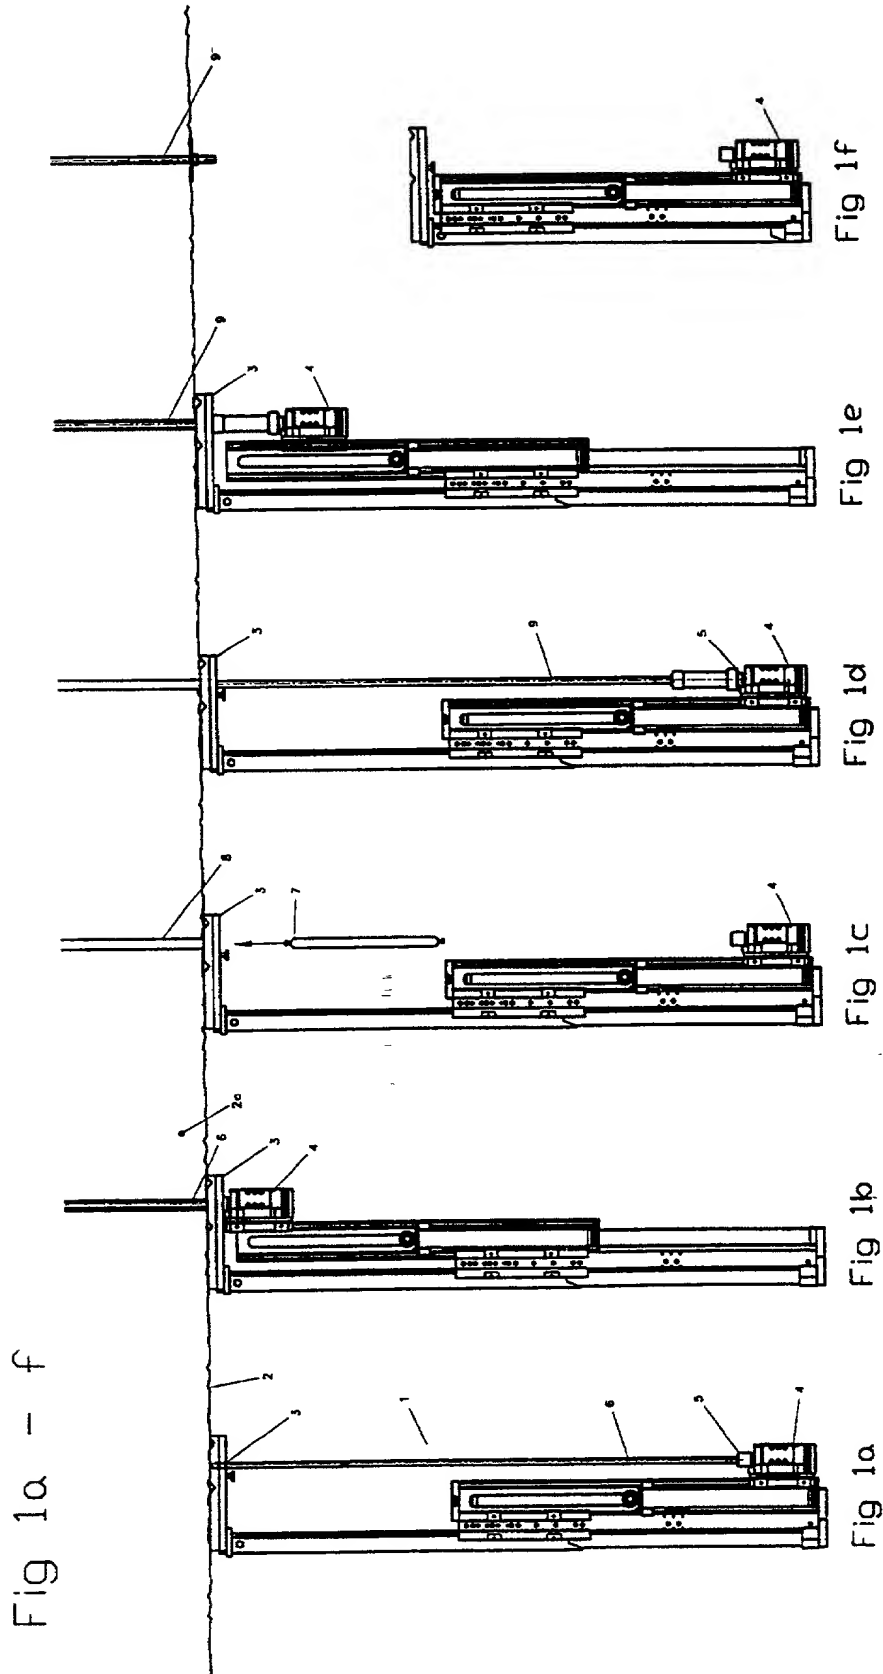

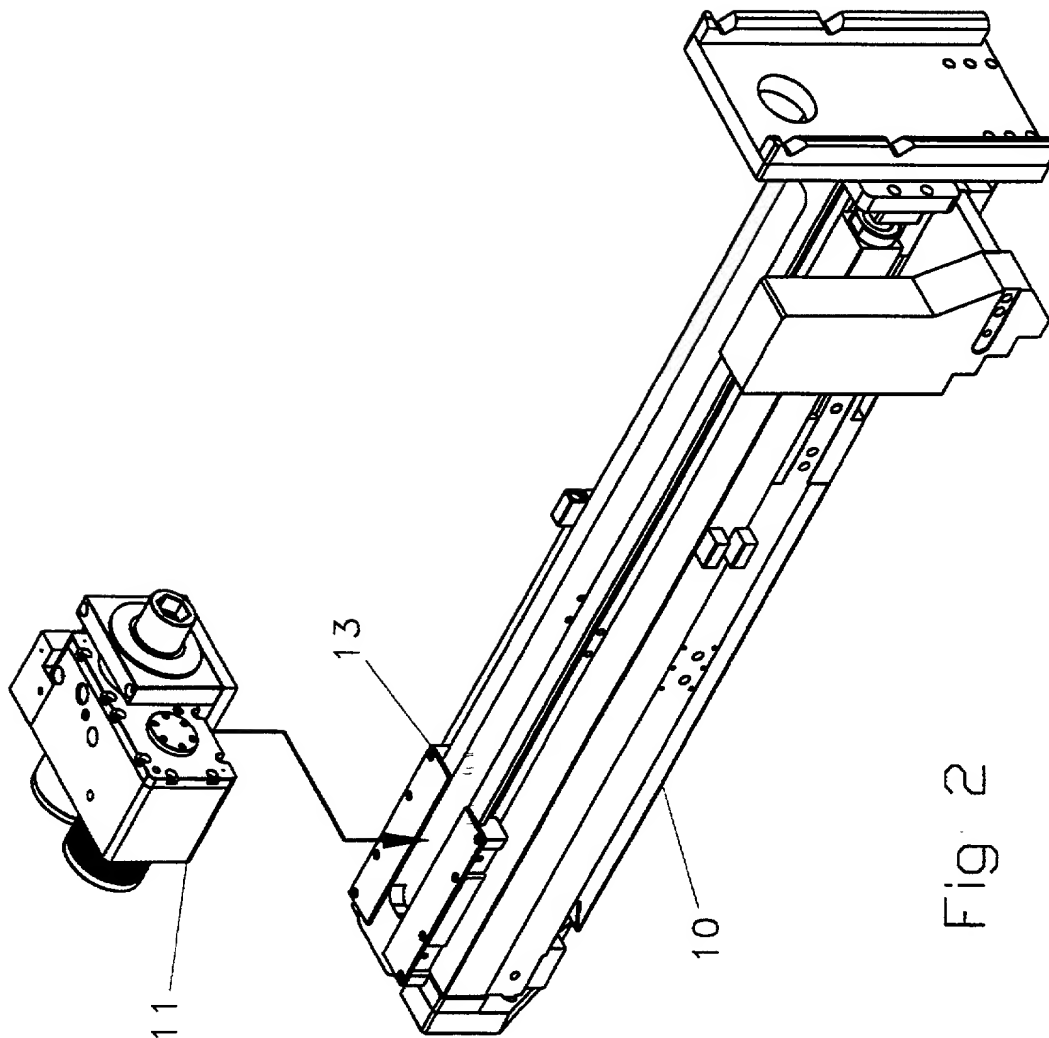


Fig. 2

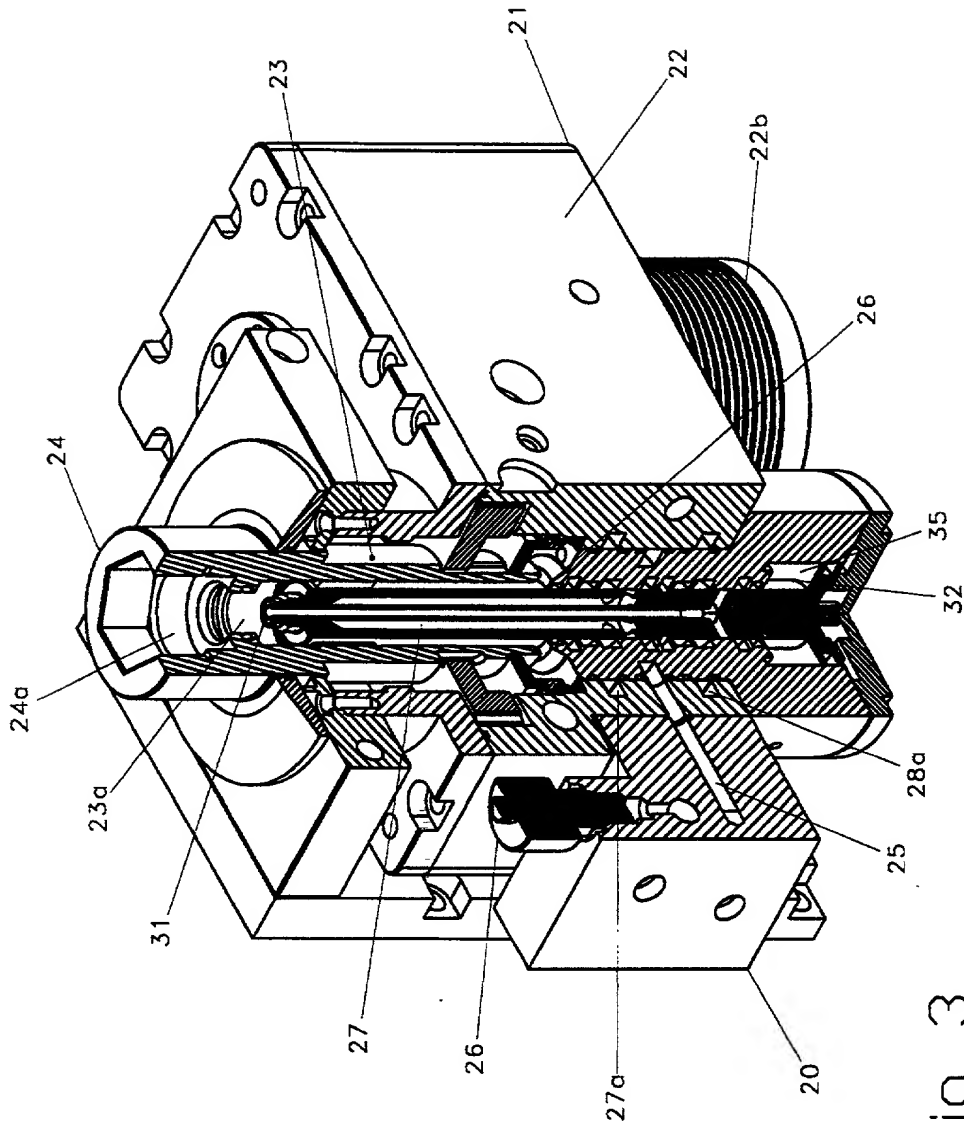
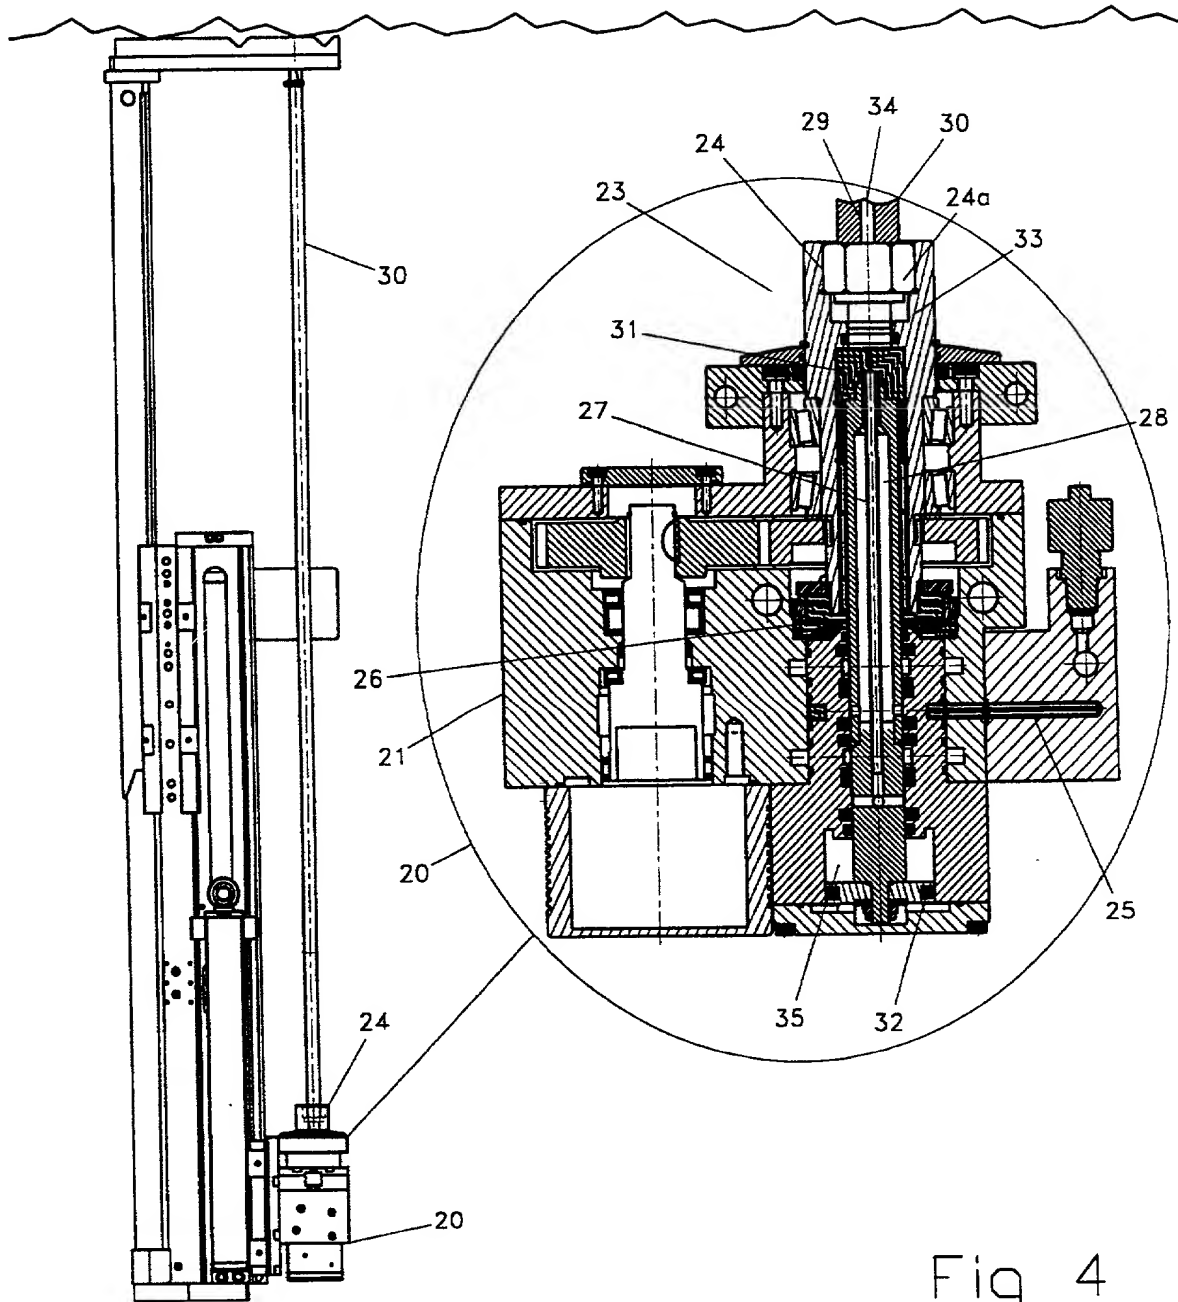


Fig 3



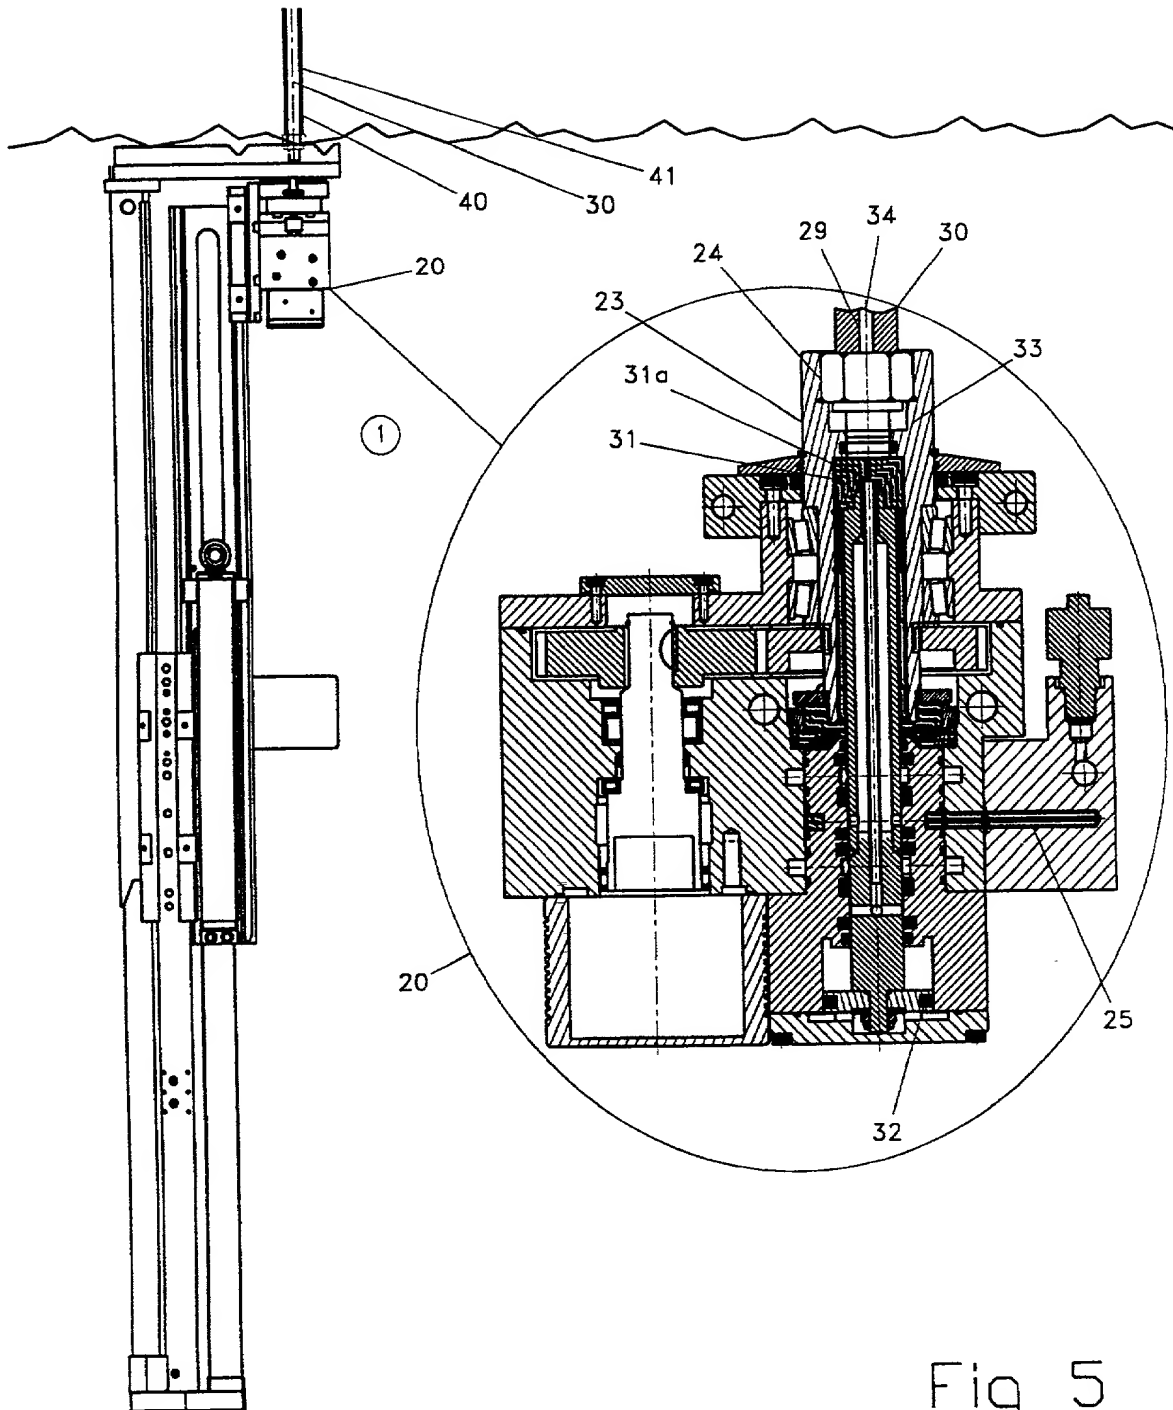


Fig 5

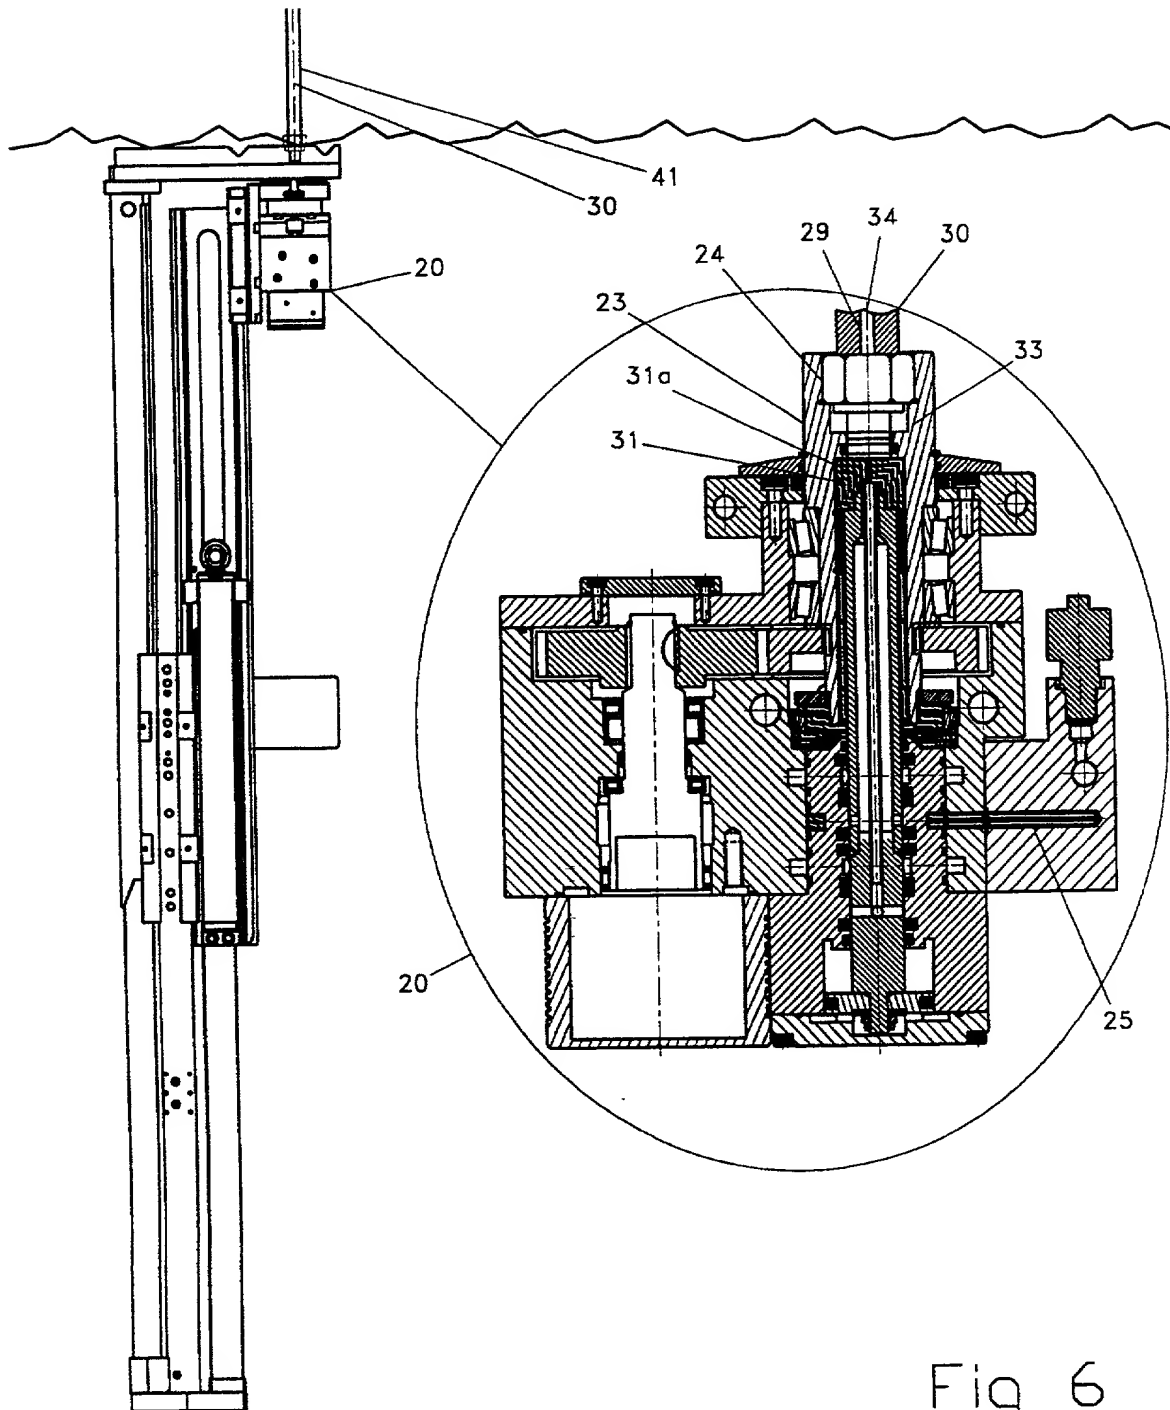


Fig 6


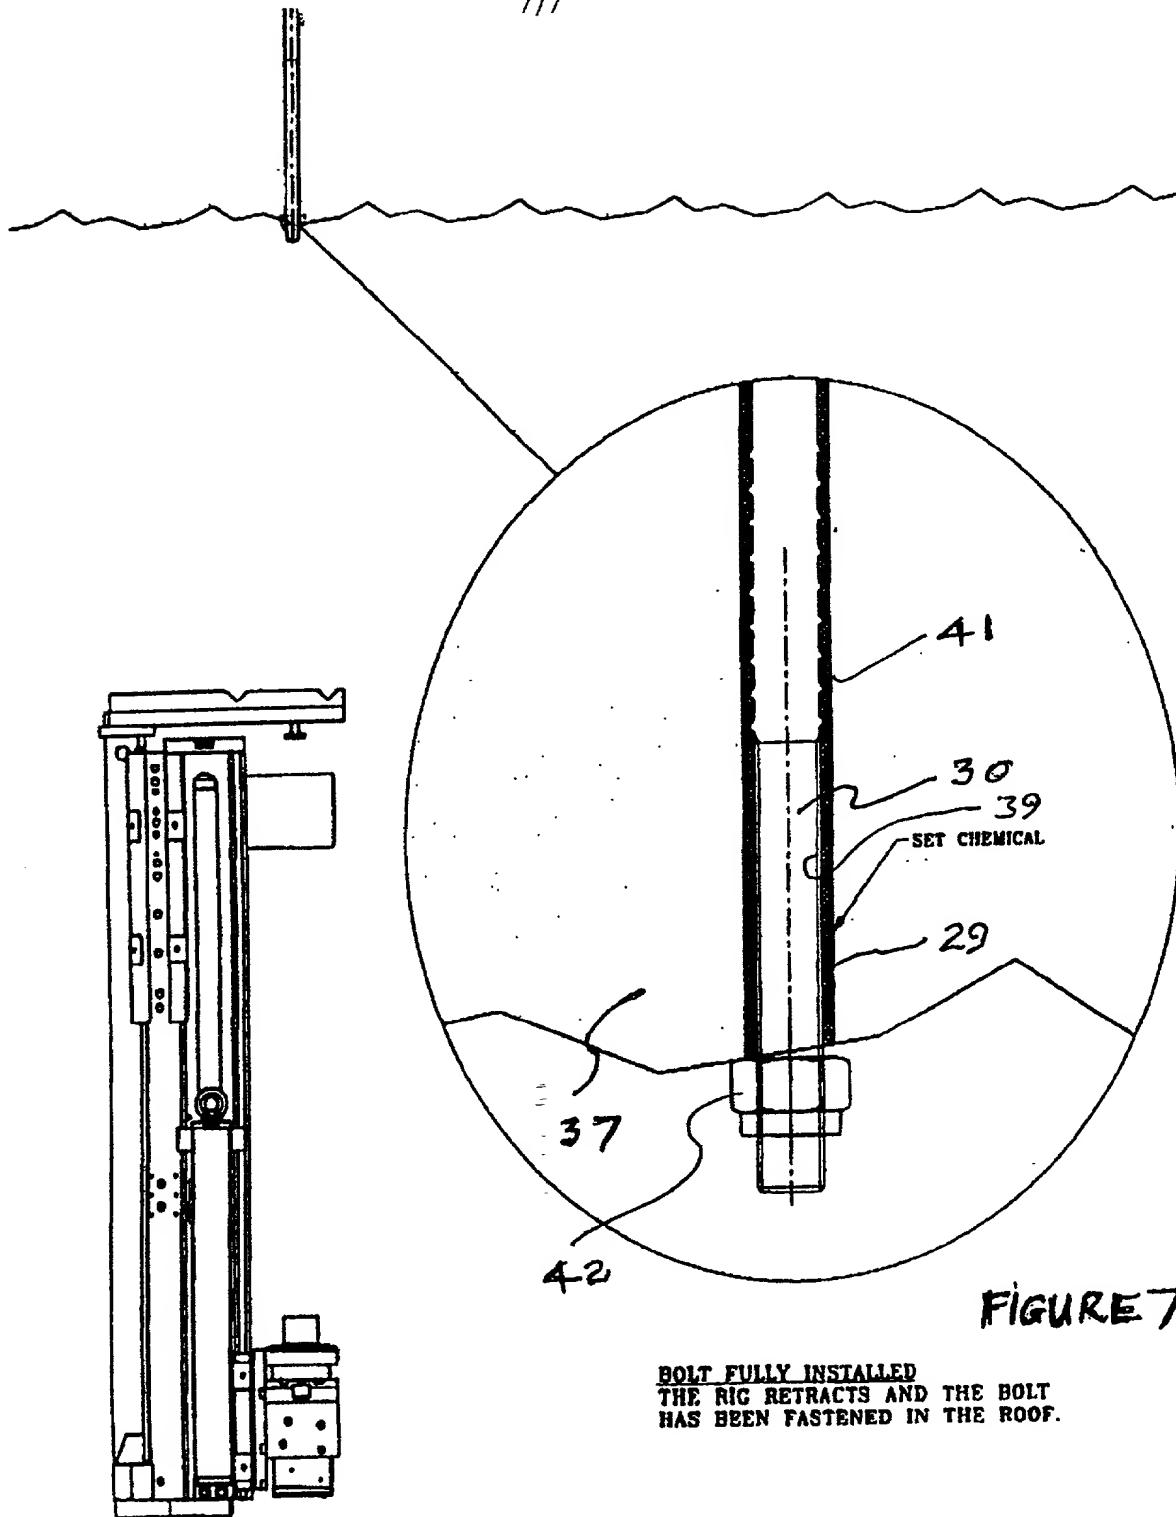


FIGURE 7

BOLT FULLY INSTALLED
THE RIG RETRACTS AND THE BOLT
HAS BEEN FASTENED IN THE ROOF.

02/01 '02 TUE 08:18 FAX

002



Saltamar Innovations

30 Fern Lane
South Portland, ME 04106
USA
Phone +1(207) 799-9733
Fax: +1(207) 228-3694
e-mail: Shalom@saltamar.com

Declaration for Patent Application

(37 CFR 1.63)

(Foreign Agent Involved)

Application Number	
Filing Date	
Group Art Unit	
Examiner Name	
First Named Inventor	Charlton
Agent Docket No	0139US-Hydrumatic

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Method and Apparatus for Insertion of Rock Bolts

the specifications of which

☐ is attached hereto.

☒ was filed on 3/31/2000 as United States Application Number or PCT Application Number PCT/AU00/00185

and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority NOT claimed Copy attached

<u>PP9553</u> (Number)	<u>AU</u> (Country)	<u>31 March 1999</u> (DD/MM/YYYY Filed)	<input type="checkbox"/>	<input type="checkbox"/>
<u>PCT/AU00/00185</u> (Number)	<u>WO</u> (Country)	<u>31 March 2000</u> (DD/MM/YYYY Filed)	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365 (c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Application Number)

(Filing Date)

(Status)


(Application Number)

(Filing Date)

(Status)

☐ Additional US or PCT international application numbers are listed on a supplemental priority data sheet

204210-88923600



Docket 0139US-Hydrumatic

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional applications listed below

Application Number(s)	Filing Date

☐ Additional provisional application numbers are listed on supplemental priority data sheet attached hereto

Power of Attorney and instruction Authorization

I hereby appoint Mr. Shalom Wertsberger of the firm Saltamar Innovations, Reg. No 43,359 to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith

I hereby authorize Shalom Wertsberger to accept and follow instructions from Mr. John Walsh of the firm Walsh & Associates, AU as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. agent named herein will be so notified by the undersigned by registered mail directed to:

Shalom Wertsberger
Saltamar Innovations
30 Fern lane
South Portland, ME 04106

Address all telephone calls to:

(207) 799-9733

Address all facsimile inquiries to:

(207) 228-3694

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of sole or first named inventor (given name, family name) Paul Charlton(Inventor Signature) [Signature]21-02-2002

(MM/DD/YYYY Date Executed)

Coal Point, NSW, Australia

(Residence (town, state))

AU

(Citizenship)

359 Coal Point Road

(Post office Address)

Coal Point, NSW 2299, Australia

(Post office Address 2)

Full name of second or joint named inventor (given name, family name)

DANIEL FLYNN(Inventor Signature) [Signature]21-01-2002

(MM/DD/YYYY Date Executed)

Lot 211 Blackhill Rd

(Residence)

AU

(Citizenship)

Black Hill

(Post office Address)

NSW 2322 AUSTRALIA

(Post office Address 2)

☐ Additional inventors are being named on sheets attached hereto

09937683-012402